


## Pneumatic Stapler Type 380/25-559 L

The light and well balanced BeA pneumatic stapler 380/25-559 L drives fasteners type 80/380 in length from 10 to 25 mm's. Due to the top loading magazine with large capacity is the stapler very well suited for stationary mounting. The main benefit of the BeA pneumatic stapler is its efficiency: high power at minimal air consumption.

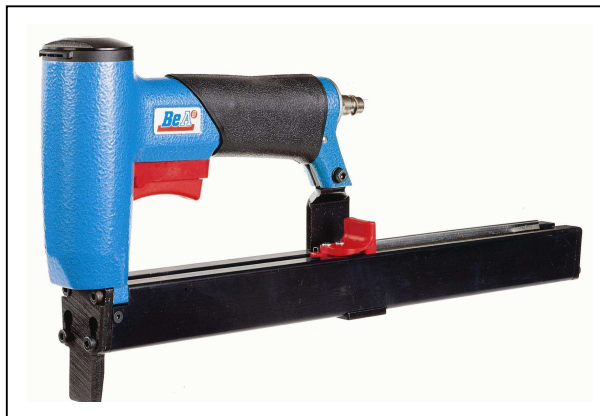

### Popular applications:

Upholstery, weather stripping, cabinetry, insulation, picture frames, boat setting, wicker work.

Length:	362,5 mm
Width:	47 mm
Height:	178 mm

### Technical data

Type description:	<b>380/25-559 L</b> Long	<b>380/25-559 AL</b> Automatic long
Article code:	12000352	12000394
Magazine type :	Top loader	Top loader
Safety:	-	-
Fastener type:	Type 80 / 380	Type 80 / 380
Magazine capacity:	322	322
Fasteners per strip:	3 x 100 type 80 / 2 x 150 type 380	3 x 100 type 80 / 2 x 150 type 380
Operating pressure:	5 – 6 bar	5 – 6 bar
Max. operating pressure:	6 bar	6 bar
Air consumption/operation:	0.45 litre / 6 bar	0.45 litre / 6 bar
Inner hose diameter:	Ø 9 mm LW recommended	Ø 9 mm LW recommended
Emission sound pressure level at the workstation:	L pA, 1s, d= 80 dB	L pA, 1s, d= 80 dB
Single-shot emission sound pressure level:	L WA, 1 s,d= 88 dB	L WA, 1 s,d= 88 dB
Weight:	1,4 kg	1,52 kg

The vibration as per document no. CEN/TC 255 WG 1 N 47.3 is under the declaration limit as per EN 292-1, amendment A.

### Extras supplied with the nailer:

Operating instructions, spare parts list, service instructions, silencer.  
For safety reasons we recommend the BeA single release if working pressure allows this.

Subject to technical modifications.

### Accessories:

Article code	Description
14405569	Remote valve
14405571	Mounting flange

All BeA pneumatic tools can be jig-mounted  
We supply the necessary accessories and equipments.



This tool conforms to the EG Directive  
for Machinery (89/392 EWG)

Product leaflet 559 L


## Pneumatic Stapler Type 380/25-559 L

Staples type 80 and type 380



BeA Deutschland  
Befestigungstechnik  
P.O.Box 14 80  
D-22904 Ahrensburg  
Phone: +49 (0) 4102 78-0  
Fax: +49 (0)4102 78-250  
www.bea-group.com  
e-mail: [info@bea-group.com](mailto:info@bea-group.com)

a division of  
Joh. Friedrich Behrens AG



Description	L = Length mm
80/20 NK	20
80/25 NK	25

380/10 NK	10
380/12 NK	12
380/14 NK	14
380/16 NKS	16

Other lengths and finishes are also available on request.

### Explanations:

NK = galvanized steel	BK = bright steel	LM = aluminium	HZ = resin coated
NKS = galvanized steel, extra hard	BKS = bright steel, extra hard	NR = stainless steel, material. 1.4401	DP = divergent point
NKH = galvanized steel, hard	MS = brass	RF = rust resistant, material 1.4301	SA = step cut