


Pneumatic Tacker Type 90/32-611

A lightweight and particularly well balanced tool
The compact design of the 90/32-611 tacker makes an ideal tool for high speed applications and for getting into hard to reach staple placements. This efficient tacker drives staples type 90 in length from 15 to 32 mm. The long magazine reduces time spent loading.

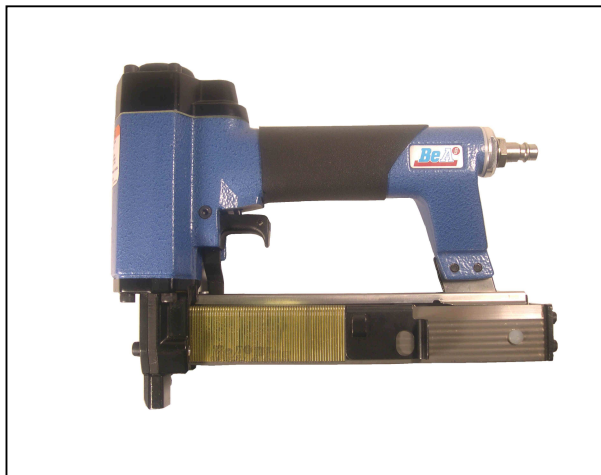

Popular applications:

Cabinetry, interior trim, lattice panels, finished gypsum board to interior wall panels-manufactured housing.

	<u>Standard</u>	<u>Long Magazine</u>
Length:	221 mm	343 mm
Width:	55 mm	55 mm
Height:	198 mm	198 mm

Technical data

Type description:	90/32-611 Contact Standard	90/32-611 L Long magazine
Article code:	12000199	12000208
Magazine type :	Top loader	Top loader
Safety:	Contact actuation	Contact actuation
Fastener type:	Type 90	Type 90
Magazine capacity:	125	215
Fasteners per strip:	1 x 100	2 x 100
Operating pressure:	5 – 8 bar	5 – 8 bar
Max. operating pressure:	8 bar	8 bar
Air consumption/operation:	0.9 litres / 6 bar	0.9 litres / 6 bar
Inner hose diameter:	Ø 9 mm LW recommended	Ø 9 mm LW recommended
Emission sound pressure level at the workstation:	L pA, 1s, d= 79 dB	L pA, 1s, d= 79 dB
Single-shot emission sound pressure level:	L WA, 1 s,d= 87 dB	L WA, 1 s,d= 87 dB
Weight:	1.3 kg	1.7 kg

The vibration as per document no. CEN/TC 255 WG 1 N 47.3 is under the declaration limit as per EN 292-1, amendment A.

Extras supplied with the nailer:

Operating instructions, spare parts list, service instructions, silencer. For safety reasons we recommend the BeA single release if working pressure allows this.

Accessories:

Subject to technical modifications.

Articel code	Description
14400855	Roller edge guide, resilient, type 611(assembly in factory)
14400857	Roller edge guide, resilient, type 611 L (assembly in factory)
14400904	Guide plate with high-adjustable stop
14401030	Coil-spring attachment set
14401075	Single actuation set
14403428	Remote valve
14403527	Mounting flange
14406951	Grip elongation
14406401	Deweton set


All BeA pneumatic tools can be jig-mounted
We supply the necessary accessories and equipments.



This tool conforms to the EG Directive for Machinery (89/392 EWG)

Pneumatic Tacker Type 90/32-611

Staples type 90



BeA Deutschland
Befestigungstechnik GmbH
P.O.Box 14 80
D-22904 Ahrensburg
Phone: (04102) 78-0
Fax: (04102) 78-250
www.bea-group.com
e-mail: info@bea-group.com

a division of
Joh. Friedrich Behrens AG

Description	L = Length mm
90/15 NK HZ	15
90/18 NK HZ	18
90/21 NK HZ	21
90/25 NK HZ	25
90/30 NK HZ	30
90/32 NK HZ	32

Other lengths and finishes are also available on request.

Explanations:

NK = galvanized steel	BK = bright steel	LM = aluminium	HZ = resin coated
NKS = galvanized steel, extra hard	BKS = bright steel, extra hard	NR = stainless steel, material. 1.4401	DP = divergent point
NKH = galvanized steel, hard	MS = brass	RF = rust resistant, material 1.4301	SA = step cut