

Pneumatic Nailer Type 900 DC

The BeA 900 DC is a compact and well balanced tool for heaviest applications. The tool is so powerful that ring shank nails will countersink even into hardwood. The 900 DC drives wire welded and plastic collated nails with diameter 2.5 to 3.1 in the length of 45 to 90 mm. The comfortable rubber grip and the adjustable exhaust make the tool operator friendly.



Popular applications:

Siding, pallets, cases, sheathing, sub flooring, house construction.

Length: 331 mm
Width: 129 mm
Height: 367 mm

Technical data

Type description:	900 DC Contact
Article code:	12100068
Magazine type :	Coil magazine / top loader
Safety:	Contact actuation
Fastener type:	BDC / TC
Magazine capacity:	1 Coil
Nails per Coil:	Ø 2.5 = 300 / 334, Ø 2.8 = 275 / 278, Ø 3.1 = 250
Operating pressure:	5 – 8 bar
Max. operating pressure:	8 bar
Air consumption/operation:	2 litres / 6 bar
Inner hose diameter:	Ø 9 mm LW recommended
Emission sound pressure level at the workstation:	L pA, 1s, d= 85 dB
Single-shot emission sound pressure level:	L WA, 1 s,d= 94 dB
Weight:	3.3 kg

The vibration as per document no. CEN/TC 255 WG 1 N 47.3 is 4.62 m/s².

Extras supplied with the nailer:

Operating instructions, spare parts list, service instructions, silencer.

Subject to technical modifications.

Accessories:

Articel code	Description
14502828	Nailer hanging, complete
14502830	Additional grip, complete
14502829	Single actuation set, complete
14502823	Contact arms smooth surface
14405541	Housing extension
14405421	Steel disc


All BeA pneumatic tools can be jig-mounted
We supply the necessary accessories and equipments.



This tool conforms to the EG Directive
for Machinery (89/392 EWG)


Pneumatic Nailer Type 900 DC

Coilnägel BDC
16° drahtverschweißte Nägel

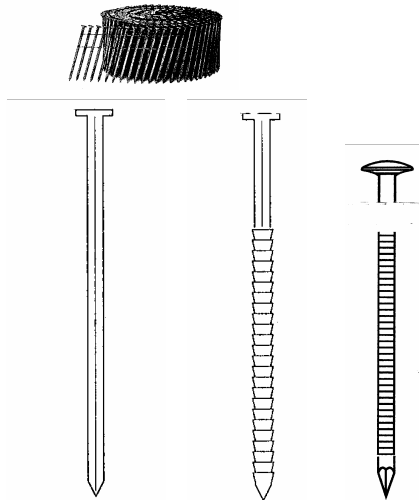

Nagelschaft Ø 2,5 – 3,1 mm
Länge 45 – 90 mm

Nägels Typ TC
kunststoffmagaziniert

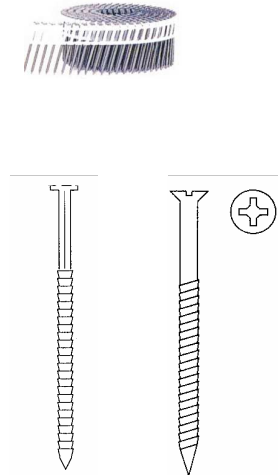

Nagelschaft Ø 2,5 – 3,1 mm
Länge 45 – 90 mm



BeA Deutschland
Befestigungstechnik
P.O.Box 14 80
D-22904 Ahrensburg
Phone: +49 (0) 4102 78-0
Fax: +49 (0) 4102 78-250
www.bea-group.com
e-mail: info@bea-group.com

a division of
Joh. Friedrich Behrens AG

Description	L = Length mm
BDC 2,5 x 45 – 70 BK / BK Ring	45 - 70
BDC 2,5 x 65 NK	65
BDC 2,5 x 45 – 70 NK Ring	45 - 70
BDC LK 2,5 x 55 – 65 NR Ring	55 – 65
BDC 2,8 x 60 – 80 BK / BK Ring	60 - 80
BDC 2,8 x 60 – 75 NK Ring	60 - 75
BDC LK 2,8 x 65 – 80 NR Ring	65 - 80
BDC NG 2,8 x 65 NK Pozi	65
BDC 3,1 x 70 – 90 BK / BK Ring	70 - 90
BDC 3,1 x 80 – 90 NK / NK Ring	80 - 90
BDC 3,1 x 80 – 90 BK Schraub	80 - 90
BDC 3,1 x 80 – 90 NR Ring	80 - 90
BDC 3,1 x 90 NK Screw	80 - 90
TC NG 2,5 x 50 NK Pozi	50
TC NG 3,1 x 75 – 90 BK Ring	80 – 90

U (BK Ring)



U (BK Ring)

U (BK Ring)

U (NK Ring)



Other lengths and finishes are also available on request.

Nails are certified to DIN 1052 Part 2. U

Explanations:

NK = galvanized steel	BK = bright steel	LM = aluminium	HZ = resin coated
NKS = galvanized steel, extra hard	BKS = bright steel, extra hard	NR = stainless steel, material. 1.4401	DP = divergent point
NKH = galvanized steel, hard	MS = brass	RF = rust resistant, material 1.4301	SA = step cut