

## Pneumatic Nailer Type 101 DCC

The BeA 101 DCC is the most powerful tool in its class, able to countersink nails into hard wood. The tool drive wire welded nails with diameter 2,5 to 3,4 mm in the lengths of 65 to 100 mm.

The comfortable rubber grip and the downwards directional exhaust makes the tool operator friendly.

The BeA 101 DCC EPAL drives wire coiled EPAL – nails with diameter 3,4 mm in the lengths of 70 and 90mm.



### Popular applications:

Roofing, framing, heavy duty pallets,  
101 DCC EPAL: Heavy duty EPAL pallets.

Length: 335 mm  
Width: 155 mm  
Height: 417 mm / EPAL = 458 mm

### Technical data

Type description:	101 DCC Contact	101 DCC EPAL
Article code:	12100254	12100255
Magazine type :	Coil magazine / top loader	Coil magazine / top loader
Safety:	Contact actuation	Contact actuation
Fastener type:	BDC	BDC
Magazine capacity:	1 coil	1 coil
Nails per Coil:	Ø 2,5 = 300 / 334, Ø 2,8 = 250 / 275 / 278 Ø 3,1 = 200 / 225 / 250	Ø 3,4 = 180
Operating pressure:	5 – 8 bar	5 – 8 bar
Max. operating pressure:	8 bar	8 bar
Air consumption/operation:	3,4 liters / 6 bar	3,4 liters / 6 bar
Inner hose diameter:	Ø 9 mm LW recommended	Ø 9 mm LW recommended
Emission sound pressure level at the workstation:	L pA, 1s, d= 89,5 dB	L pA, 1s, d= 89,5 dB
Single-shot emission sound pressure level:	L WA, 1 s,d=101,73 dB	L WA, 1 s,d=101,73 dB
Weight:	5,5 kg	5,5 kg

The vibration as per document no. CEN/TC 255 WG 1 N 47.3 is 4,36 m/s<sup>2</sup>

**Extras supplied with the nailer:** Operating instructions, spare parts list, service instructions, silencer, single actuation set. Tool case included.

Subject to technical modifications.

### Accessories:

Articel code	Description
14505583	Nailer hanging, compl.
14500531	Single actuation set
14502830	Additional grip, compl.

All BeA pneumatic tools can be jig-mounted  
We supply the necessary accessories and equipments.




This tool conforms to the EG Directive  
for Machinery (89/392 EWG)

## Pneumatic Nailer Type 101 DCC


Collated nails BDC (16° wire welded nails)



BeA Deutschland  
Befestigungstechnik GmbH  
P.O.Box 14 80  
D-22904 Ahrensburg  
Phone: (04102) 78-0  
Fax: (04102) 78-250  
www.bea-group.com  
e-mail: [info@bea-group.com](mailto:info@bea-group.com)

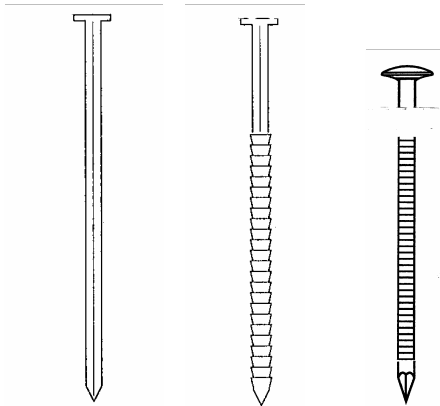

Nail shank: Ø 2,5 to 3,1 mm  
Length: 65 to 100 mm

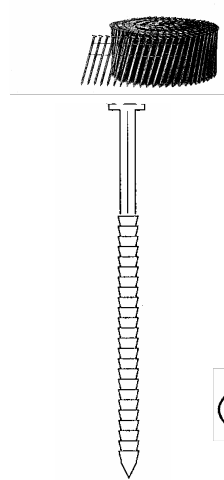

EPAL nails: Nail shank: Ø 3,4 mm  
Length: 70 bis 90 mm

Description	L = Length mm	
BDC 2,5 x 65 – 70 BK / BK Ring	65 - 70	U (BK Ring)
BDC 2,5 x 65 NK	65	
BDC 2,5 x 65 - 70 NK Ring	65 - 70	U
BDC LK 2,5 x 65 NR Ring	65	U
BDC 2,8 x 65 – 80 BK / BK Ring	65 - 80	U (BK Ring)
BDC 2,8 x 65 – 75 NK Ring	65 - 75	U
BDC LK 2,8 x 65 – 80 NR Ring	65 - 80	U
BDC NG 2,8 x 65 NK Pozi	65	
BDC 3,1 x 70 – 100 BK / BK Ring	70 - 100	U (BK Ring to 80 mm)
BDC 3,1 x 80 – 90 NK / NK Ring	80 - 90	U (NK Ring)
BDC 3,1 x 80 – 90 BK Schraub	80 - 90	
BDC 3,1 x 80 – 90 NR Ring	80 - 90	U
BDC 3,1 x 90 NK Schraub	80 - 90	
BDC 3,4 x 70 und 90 BK Ring EPAL	70 + 90	*

Other lengths and finishes are also available on request.

Nails are certified to DIN 1052 Part 2. U \* Nails are certified by the EPAL-organisation.

### Explanations:

NK = galvanized steel	BK = bright steel	LM = aluminium	HZ = resin coated
NKS = galvanized steel, extra hard	BKS = bright steel, extra hard	NR = stainless steel, material. 1.4401	DP = divergent point
NKH = galvanized steel, hard	MS = brass	RF = rust resistant, material 1.4301	SA = step cut